



# **CE EMC TEST REPORT**

for

**Product: AC frequency conversion barrier gate**

**Model: D118, D102,D118,D128,D126,P820,D112,D137,D127,D109,D115**

**Report No.: PTC19061402901E-EM01**

Issued for

**Guangdong Ankuai Intelligent Technology Co., Ltd.**

**No. 91, Tangtian South Road, Tangxia Town, Dongguan City, Guangdong  
Province, China**

Issued by

**Dongguan Precise Testing & Certification Corp., Ltd.**

**Building 1, No. 6, Tongxin Road, Dongcheng Street, Dongguan, Guangdong,  
China.**

**TEL: +86-769-3880 8222**

**FAX: +86-769-3882 6111**

Note: This report shall not be reproduced except in full, without the written approval of Dongguan Precise Testing & Certification Corp., Ltd. This document may be altered or revised by Dongguan Precise Testing & Certification Corp., Ltd. personnel only, and shall be noted in the revision section of the document. The test results presented in this report only relate to the tested sample.



## TABLE OF CONTENTS

<b>1. TEST CERTIFICATION.....</b>	<b>3</b>
<b>2. TEST SUMMARY.....</b>	<b>4</b>
<b>3. TEST SITE.....</b>	<b>5</b>
3.1. TEST FACILITY.....	5
3.2. MEASUREMENT UNCERTAINTY.....	5
3.3. LIST OF TEST AND MEASUREMENT INSTRUMENTS.....	6
<b>4. EUT DESCRIPTION.....</b>	<b>9</b>
<b>5. TEST METHODOLOGY.....</b>	<b>10</b>
5.1. TEST MODE.....	10
5.2. EUT SYSTEM OPERATION.....	10
<b>6. SETUP OF EQUIPMENT UNDER TEST.....</b>	<b>11</b>
6.1. DESCRIPTION OF SUPPORT UNITS.....	11
6.2. CONFIGURATION OF SYSTEM UNDER TEST.....	11
<b>7. EMISSION TEST.....</b>	<b>12</b>
7.1. CONDUCTED EMISSION MEASUREMENT.....	12
7.2. RADIATED EMISSION MEASUREMENT.....	16
7.3. HARMONICS CURRENT MEASUREMENT.....	20
7.4. VOLTAGE FLUCTUATION AND FLICKS MEASUREMENT.....	25
<b>8. IMMUNITY TEST.....</b>	<b>27</b>
8.1. GENERAL DESCRIPTION.....	27
8.2. GENERAL PERFORMANCE CRITERIA DESCRIPTION.....	28
8.3. ELECTROSTATIC DISCHARGE (ESD).....	29
8.4. RADIATED, RADIO-FREQUENCY, ELECTROMAGNETIC FIELD (RS).....	33
8.5. ELECTRICAL FAST TRANSIENT (EFT).....	36
8.6. SURGE IMMUNITY TEST.....	38
8.7. CONDUCTED RADIO FREQUENCY DISTURBANCES (CS).....	40
8.8. POWER FREQUENCY MAGNETIC FIELD.....	42
8.9. VOLTAGE DIP & VOLTAGE INTERRUPTIONS.....	45
<b>9. PHOTOGRAPHS OF THE TEST CONFIGURATION.....</b>	<b>47</b>
<b>10. PHOTOGRAPHS OF EUT.....</b>	<b>52</b>



## 1. TEST CERTIFICATION

Product:	AC frequency conversion barrier gate
Model:	D118, D102,D118,D128,D126,P820,D112,D137,D127,D109,D115
Applicant :	Guangdong Ankuai Intelligent Technology Co., Ltd.
Address:	No. 91, Tangtian South Road, Tangxia Town, Dongguan City, Guangdong Province, China
Manufacturer:	Guangdong Ankuai Intelligent Technology Co., Ltd.
Address:	No. 91, Tangtian South Road, Tangxia Town, Dongguan City, Guangdong Province, China
Test Date:	June 28, 2019 to August 02, 2019
Issued Date:	August 02, 2019
Test Voltage:	AC 230V/50Hz
Applicable Standards:	EMC Directive 2014/30/EU EN 55032:2015 EN 55024:2010+A1:2015 EN 61000-3-2:2014 EN 61000-3-3:2013

The above equipment has been tested by Dongguan Precise Testing & Certification Corp., Ltd. and found compliance with the requirements in the technical standards mentioned above. The test results presented in this report only relate to the product/system tested. The Other similar equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

Test Engineer:

Technical Manager:







## 2. TEST SUMMARY

EMISSION			
Standard	Item	Result	Remarks
EN 55032:2015	Conducted emission (Mains Port)	PASS	Meet Class B limit
	Radiated emission	PASS	Meet Class B limit
EN 61000-3-2:2014	Harmonic current emissions	PASS	Complied with limit
EN 61000-3-3:2013	Voltage fluctuations & flicker	PASS	Complied with limit

IMMUNITY			
Standard	Item	Result	Remarks
EN 61000-4-2:2009	ESD	PASS	Complied with the requirements
EN 61000-4-3:2006+ A1:2008+A2:2010	RS	PASS	Complied with the requirements
EN 61000-4-4:2012	EFT	PASS	Complied with the requirements
EN 61000-4-5:2014	Surge	PASS	Complied with the requirements
EN 61000-4-6:2014	CS	PASS	Complied with the requirements
EN 61000-4-8:2010	PFMF	N/A	Not applicable
EN 61000-4-11:2004	Voltage dips & voltage variations	PASS	Complied with the requirements

Note: 1) The test result verdict is decided by the limit of test standard.

2) The information of measurement uncertainty is available upon the customer's request.



### 3. TEST SITE

#### 3.1. TEST FACILITY

Dongguan Precise Testing & Certification Corp., Ltd.

Address: Building 1, No. 6, Tongxin Road, Dongcheng Street, Dongguan, Guangdong, China.

☆ CNAS Registration No.: CNAS L5772

☆ FCC Registration No.: 790290

☆ A2LA Certificate No.: 4408.01

☆ IC Registration No.: 12191A-1

Test Lab: Guangdong Dongguan Quality Supervision Testing Center

Address: No. 2, Industrial South Road, Songshan Lake Science and Technology Industrial Park, Dongguan City, China

Test items: radio frequency electromagnetic field immunity (R/S) test

#### 3.2. MEASUREMENT UNCERTAINTY

Parameter	Uncertainty
Temperature	$\pm 1^{\circ} \text{C}$
Humidity	$\pm 5\%$
DC and Low Frequency Voltages	$\pm 3\%$
Conducted Emission(150KHz-30MHz)	$\pm 3.60\text{dB}$
Radiated Emission(30MHz-1GHz)	$\pm 4.76\text{dB}$
Radiated Emission (1GHz-18GHz)	$\pm 4.44\text{dB}$

Note 1: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k=2$ .



### 3.3. LIST OF TEST AND MEASUREMENT INSTRUMENTS

#### 3.3.1. For conducted emission at the mains terminals test

Name of Equipment	Manufacturer	Model	Serial No.	Calibration Due
EMI Test Receiver	Rohde&Schwarz	ESCI	101417	Sep. 19, 2019
Artificial Mains Network	Rohde&Schwarz	L2-16B	000WX31025	Sep. 19, 2019
Artificial Mains Network	Rohde&Schwarz	ENV216	101342	Sep. 19, 2019

#### 3.3.2. For radiated emission test (30MHz-1GHz)

Name of Equipment	Manufacturer	Model	Serial No.	Calibration Due
EMI Test Receiver	Rohde&Schwarz	ESCI	101417	Sep. 19, 2019
Bilog Antenna	SCHWARZBECK	VULB 9168	9168-572	Sep. 21, 2019
Preamplifier (low frequency)	SCHWARZBECK	BBV 9475	9745-0013	Sep. 19, 2019

#### 3.3.3. For radiated emission test (1GHz above)

Name of Equipment	Manufacturer	Model	Serial No.	Calibration Due
EMI Test Receiver	Rohde&Schwarz	ESCI	101417	Sep. 19, 2019
Spectrum Analyzer	Agilent	E4407B	MY45109572	Oct. 12, 2019
Horn Antenna	SCHWARZBECK	9120D	9120D-1246	Sep. 26, 2019
LOW NOISE AMPLIFIER	ZHINAN	ZN3380C	15002	Sep. 19, 2019





### 3.3.4. For harmonic current emissions and voltage fluctuations/flicker test

Name of Equipment	Manufacturer	Model	Serial No.	Calibration Due
Harmonics / Flicker Test System	California Instruments	CTS/PACS-1-115	1534A00401	Sep. 19, 2019
AC Power Source	California Instruments	3001IX-208-CTS	1534A00401	Sep. 19, 2019

### 3.3.5. For electrostatic discharge immunity test

Name of Equipment	Manufacturer	Model	Serial No.	Calibration Due
ESD Generator	SCHLODER	SESD216	606137	Dec. 14, 2019

### 3.3.6. For radio frequency electromagnetic field immunity (R/S) test (DQT)

Name of Equipment	Manufacturer	Model	Serial No.	Calibration Due
Signal Generator	Agilent	N517113-50B	MY53050160	Sep. 19, 2019
Amplifier	A&R	150W1000M3	313157	Sep. 19, 2019
Amplifier	A&R	50SIG6M2	0342835	Sep. 19, 2019
Antenna	SCHWARZBECK	STLP9149	9149.222	Sep. 19, 2019
Isotropic Field Probe	A&R	FL7006	0342652	Sep. 19, 2019
Log-periodic Antenna	SCHWARZBECK	STLP 9128E	9128E-012	Sep. 19, 2019

### 3.3.7. For electrical fast transient/burst immunity test

Name of Equipment	Manufacturer	Model	Serial No.	Calibration Due
EFT Tester	HTEC	HEFT 51	1416010	Sep. 19, 2019
EFT Coupling Clamp	HTEC	HEFT 51-C	1416011	Sep. 19, 2019

### 3.3.8. For surge immunity test

Name of Equipment	Manufacturer	Model	Serial No.	Calibration Due
Surge Tester	HTEC	HCWG 71	174302	Sep. 19, 2019
Surge Tester	HTEC	TCOMB 4	142103	Sep. 19, 2019
Surge Tester	HTEC	HTSG 70	175002	Sep. 19, 2019

### 3.3.9. For injected currents susceptibility test

Name of Equipment	Manufacturer	Model	Serial No.	Calibration Due
C/S Test System	SCHLODER	CDG-6000-25	126A1279/2014	Sep. 19, 2019
Coupling Decoupling Network	SCHLODER	CDN-M2+3	A2210251/2013	Sep. 19, 2019
Electromagnetic Injection Clamp	Luthi	EM101	36041	Sep. 19, 2019

### 3.3.10. For power frequency magnetic field immunity test

Name of Equipment	Manufacturer	Model	Serial No.	Calibration Due
Magnetic Field Tester	HTEC	HPFMF	142104	Sep. 19, 2019

### 3.3.11. For voltage dips and short interruptions immunity test

Name of Equipment	Manufacturer	Model	Serial No.	Calibration Due
Dips Tester	HTEC	HPFS	1416009	Sep. 19, 2019





#### 4. EUT DESCRIPTION

<b>Product</b>	AC frequency conversion barrier gate
<b>Model</b>	D118, D102,D118,D128,D126,P820,D112,D137,D127,D109,D115
<b>Supplied Voltage</b>	AC 230V/ 50Hz
<b>Power</b>	176W

##### I/O PORT

I/O PORT TYPES	Q'TY	TESTED WITH
AC Port	1	<input checked="" type="checkbox"/>
DC Port	1	<input type="checkbox"/>

##### Models Difference

The internal structure of each model is consistent, the PCB board circuit is the same, only the appearance, color, model name difference, does not affect the product safety and electromagnetic compatibility performance.

## 5. TEST METHODOLOGY

### 5.1. TEST MODE

The EUT was tested together with the thereafter additional components, and a configuration, which produced the worst emission levels, was selected and recorded in this report.

The following test mode(s) were assessed.

Test Items		Test Mode
Emission	Conducted Emission	Working
	Radiated Emission	Working
	Harmonic current emissions	Working
	Voltage fluctuations & flicker	Working
Immunity	ESD	Working
	RS	Working
	EFT	Working
	Surge	Working
	C/S	Working
	M/S	N/A
	Dips	Working

### 5.2. EUT SYSTEM OPERATION

1. Set up EUT with the support equipment.
2. Make sure the EUT work normally during the test.



## 6. SETUP OF EQUIPMENT UNDER TEST

### 6.1. DESCRIPTION OF SUPPORT UNITS


The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

No.	Equipment	Model	Serial No.	FCC ID	Trade Name	Data Cable	Power Cord
1.	N/A	N/A	N/A	N/A	N/A	N/A	N/A

Note: 1) All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.

2) Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

### 6.2. CONFIGURATION OF SYSTEM UNDER TEST



(EUT: AC frequency conversion barrier gate)



## 7. EMISSION TEST

### 7.1. CONDUCTED EMISSION MEASUREMENT

#### 7.1.1. LIMITS

FREQUENCY (MHz)	Class A		Class B	
	Quasi-peak dB( $\mu$ V)	Average dB( $\mu$ V)	Quasi-peak dB( $\mu$ V)	Average dB( $\mu$ V)
0.15 - 0.5	79	66	66-56	56-46
0.5 - 5.0	73	60	56	46
5.0 - 30.0	73	60	60	50

Note: 1) The lower limit shall apply at the transition frequencies.

2) The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.

#### 7.1.2. TEST PROCEDURES


The EUT and Support equipment, if needed, was set up as per the test configuration to simulate typical usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane. When the EUT is floor standing equipment, it is placed on the ground plane, which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane. The EUT should be 0.8 m apart from the AMN, where the mains cable supplied by the manufacturer is longer than 1 m, the excess should be folded at the centre into a bundle no longer than 0.4 m, Details please refer to test setup photography.

The Receiver scanned from 150 kHz to 30 MHz for emissions in each of the test modes. During the above scans, the emissions were maximized by cable manipulation.

A scan was taken on both of the power lines, Line and neutral, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. The test data of the worst-case condition(s) was recorded.

Note: Test Software Name: e3, Software Version: 1.0.0.0.

### 7.1.3. TEST SETUP

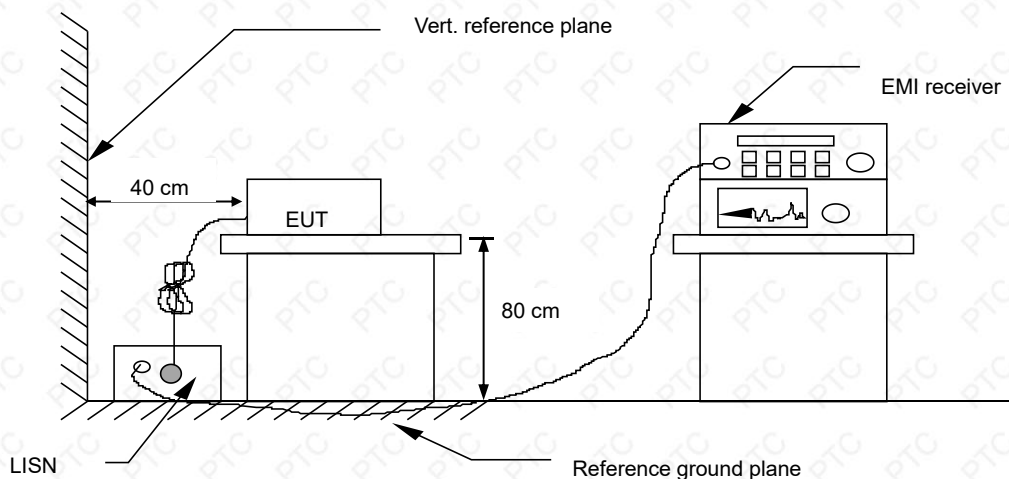

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

### 7.1.4. TEST RESULT

<b>Product name</b>	AC frequency conversion barrier gate	<b>Tested By</b>	Yang
<b>Model</b>	D118	<b>Detector Function</b>	Peak / Quasi-peak/AV
<b>Test Mode</b>	Working	<b>6 dB Bandwidth</b>	9 kHz
<b>Environmental Conditions</b>	24.2°C, 54.5 % RH, 101.1 kPa	<b>Test Result</b>	Pass

Note:

L = Line Line, N = Neutral Line

Freq. = Emission frequency in MHz

Reading level (dBμV) = Receiver reading

Corr. Factor (dB) = attenuator + Cable loss

Level (dBμV) = Reading level (dBμV) + Corr. Factor (dB)

Limit (dBμV) = Limit stated in standard


Over Limit (dB) = Level (dBμV) – Limit (dBμV)

QP = Quasi-Peak

AV = Average

Please refer to the following diagram:

Line:

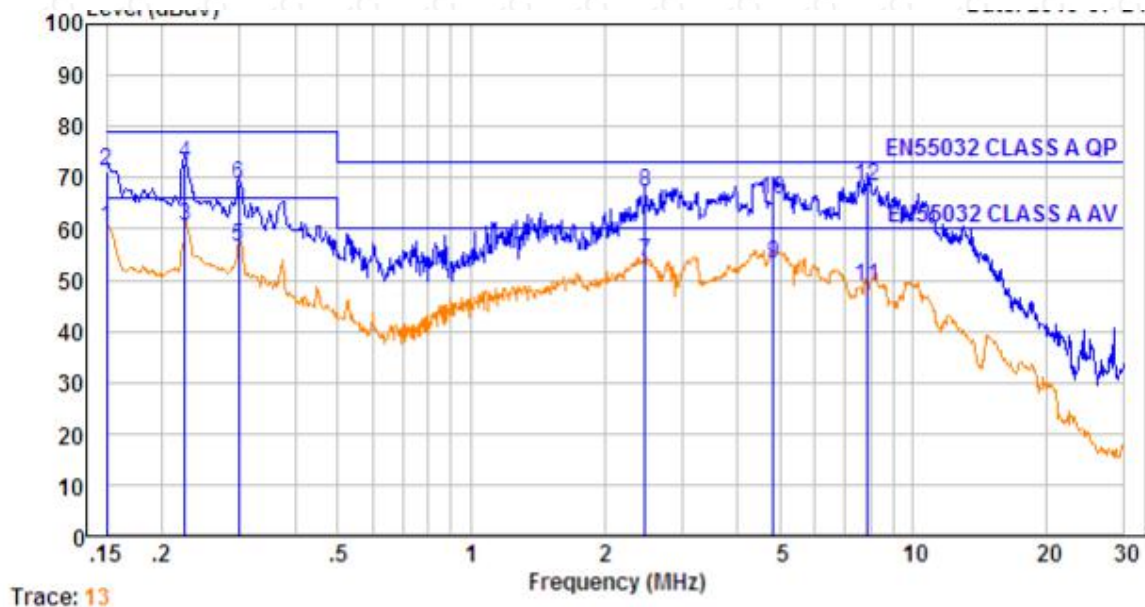


No.	Freq MHz	Cable Loss dB	AMN Factor dB	Receiver Reading dBμV	Emission Level dBμV	Limit dBμV	Over Limit dB	Remark
1.	0.150	0.21	9.50	50.36	60.07	66.00	-5.93	Average
2.	0.150	0.21	9.50	61.51	71.22	79.00	-7.78	QP
3.	0.226	0.31	9.61	50.59	60.51	66.00	-5.49	Average
4.	0.226	0.31	9.61	62.63	72.55	79.00	-6.45	QP
5.	0.299	0.37	9.67	46.29	56.33	66.00	-9.67	Average
6.	0.299	0.37	9.67	58.56	68.60	79.00	-10.40	QP
7.	2.474	0.47	9.86	43.05	53.38	60.00	-6.62	Average
8.	2.474	0.47	9.86	56.66	66.99	73.00	-6.01	QP
9.	4.822	0.50	9.91	42.90	53.31	60.00	-6.69	Average
10.	4.822	0.50	9.91	55.24	65.65	73.00	-7.35	QP
11.	7.893	0.55	9.98	38.19	48.72	60.00	-11.28	Average
12.	7.893	0.55	9.98	57.65	68.18	73.00	-4.82	QP





Neutral:

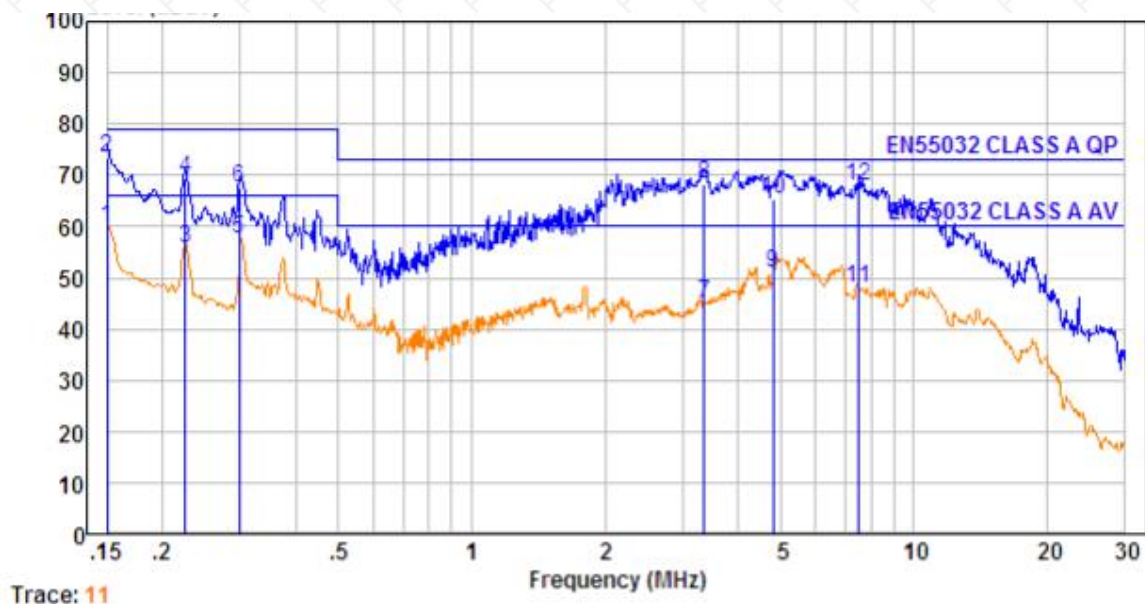

No.	Freq MHz	Cable Loss dB	AMN Factor dB	Receiver Reading dBμV	Emission Level dBμV	Limit dBμV	Over Limit dB	Remark
1.	0.150	0.21	9.53	50.09	59.83	66.00	-6.17	Average
2.	0.150	0.21	9.53	63.51	73.25	79.00	-5.75	QP
3.	0.226	0.31	9.64	45.63	55.58	66.00	-10.42	Average
4.	0.226	0.31	9.64	59.52	69.47	79.00	-9.53	QP
5.	0.299	0.37	9.70	47.57	57.64	66.00	-8.36	Average
6.	0.299	0.37	9.70	57.52	67.59	79.00	-11.41	QP
7.	3.364	0.47	9.93	34.75	45.15	60.00	-14.85	Average
8.	3.364	0.47	9.93	57.69	68.09	73.00	-4.91	QP
9.	4.797	0.50	9.96	40.49	50.95	60.00	-9.05	Average
10.	4.797	0.50	9.96	54.92	65.38	73.00	-7.62	QP
11.	7.526	0.55	9.99	37.45	47.99	60.00	-12.01	Average
12.	7.526	0.55	9.99	57.52	68.06	73.00	-4.94	QP

## 7.2. RADIATED EMISSION MEASUREMENT

### 7.2.1. LIMITS

FREQUENCY (MHz)	Class A(At 3m)	Class B(At 3m)
	Quasi-peak dB( $\mu$ V/m)	Quasi-peak dB( $\mu$ V/m)
30 ~ 230	50	40
230 ~ 1000	57	47

Note: 1) The lower limit shall apply at the transition frequencies.

2) Emission level (dB $\mu$ V/m) = 20 log Emission level ( $\mu$ V/m).

### 7.2.2. TEST PROCEDURE

The equipment was set up as per the test configuration to simulate typical usage per the user's manual. When the EUT is a tabletop system, a wooden turntable with a height of 0.8 meters is used which is placed on the ground plane. When the EUT is floor standing equipment, it is placed on the ground plane which has a 0.1 m non-conductive covering to insulate the EUT from the ground plane.

The antenna was placed at 3 meter away from the EUT. The antenna connected to the spectrum analyzer via a cable and at times a pre-amplifier would be used.


The analyzer / receiver quickly scanned from 30 MHz to 1000 MHz. The EUT test program was started. Emissions were scanned and measured rotating the EUT to 360 degrees and positioning the antenna 1 to 4 meters above the ground plane, in both the vertical and the horizontal polarization, to maximize the emission reading level.

During the above scans, the emissions were maximized by cable manipulation. Each modes is measured, recorded at least the six highest emissions. The emission frequency, amplitude, antenna position, polarization and turntable position were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit and only Q.P. reading is presented.

The test data of the worst-case condition(s) was recorded.

Note: Test Software Name: e3, Software Version: 8.2.1.0.

### 7.2.3. TEST SETUP

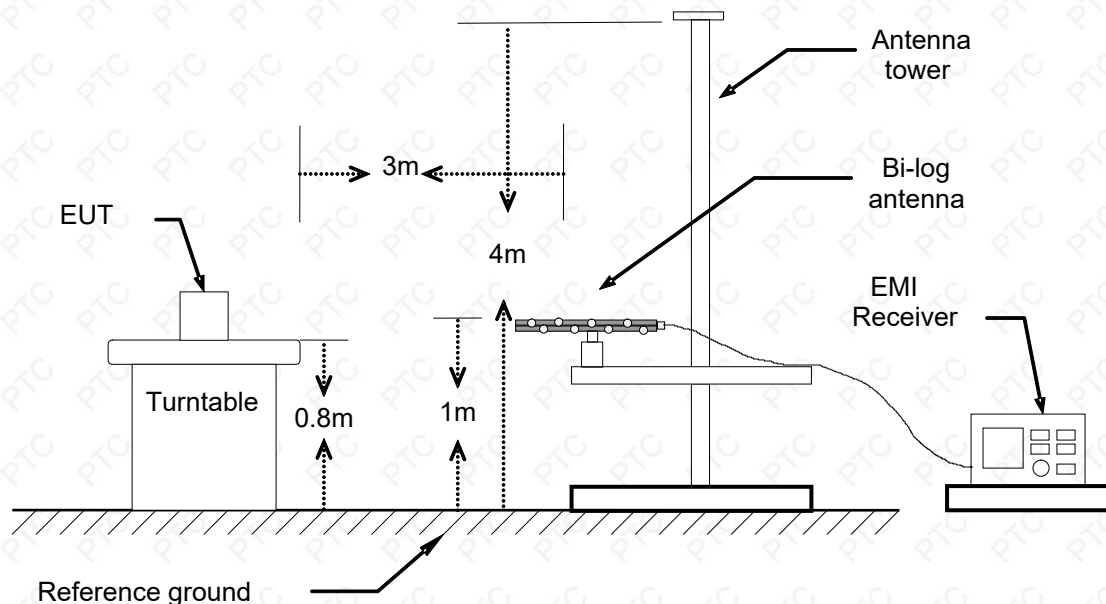

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration

### 7.2.4. TEST RESULT

<b>Product name</b>	AC frequency conversion barrier gate	<b>Antenna Distance</b>	3 m
<b>Model</b>	D118	<b>Antenna Pole</b>	Vertical / Horizontal
<b>Test Mode</b>	Working	<b>Detector Function</b>	Quasi-peak
<b>Environmental Conditions</b>	24.2℃, 54.5 % RH, 101.1 kPa	<b>6 dB Bandwidth</b>	120 kHz
<b>Tested by</b>	Yang	<b>Test Result</b>	Pass

Note:

Freq. = Emission frequency in MHz

Reading level (dBμV) = Receiver reading(dBμV)

Corr.Factor (dB/m)=Antenna factor(dB/m)+Cable loss(dB)-Preamp Factor(dB)

Measurement (dBμV/m)=Reading level(dBμV)+ Corr. Factor (dB/m)

Limit (dBμV/m) = Limit stated in standard

Over Limit (dB) = Measurement (dBμV/m) – Limit (dBμV/m)


QP = Quasi-Peak

The highest frequency of the internal sources of the EUT was less than 108 MHz, so the measurement was only made up to 1 GHz.




Please refer to the following diagram:

Vertical:

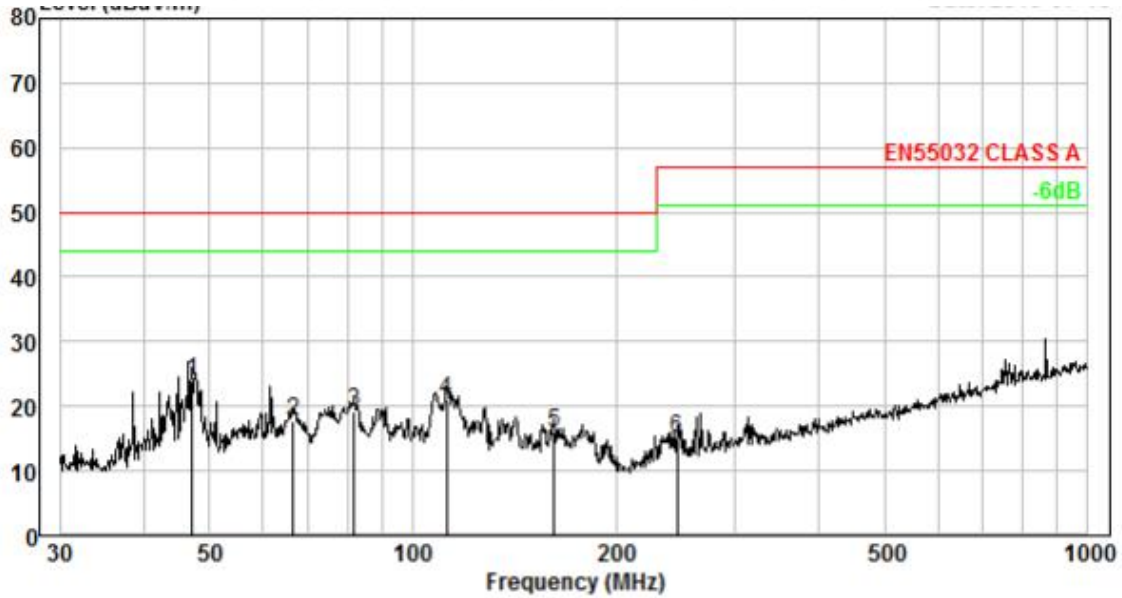

No.	Freq MHz	Cable Loss dB	ANT Factor dB/m	Receiver Reading dBuV	Preamp Factor dB	Emission Level dBuV/m	Limit dBuV/m	Over Limit dB	Remark
1.	47.160	1.98	12.81	39.25	30.13	23.91	50.00	-26.09	QP
2.	66.499	2.57	11.27	34.23	30.25	17.82	50.00	-32.18	QP
3.	81.783	2.93	8.74	37.81	30.32	19.16	50.00	-30.84	QP
4.	112.131	3.47	11.28	36.75	30.43	21.07	50.00	-28.93	QP
5.	162.041	4.10	13.76	28.75	30.56	16.05	50.00	-33.95	QP
6.	246.815	4.82	11.86	29.18	30.70	15.16	57.00	-41.84	QP

Horizontal:

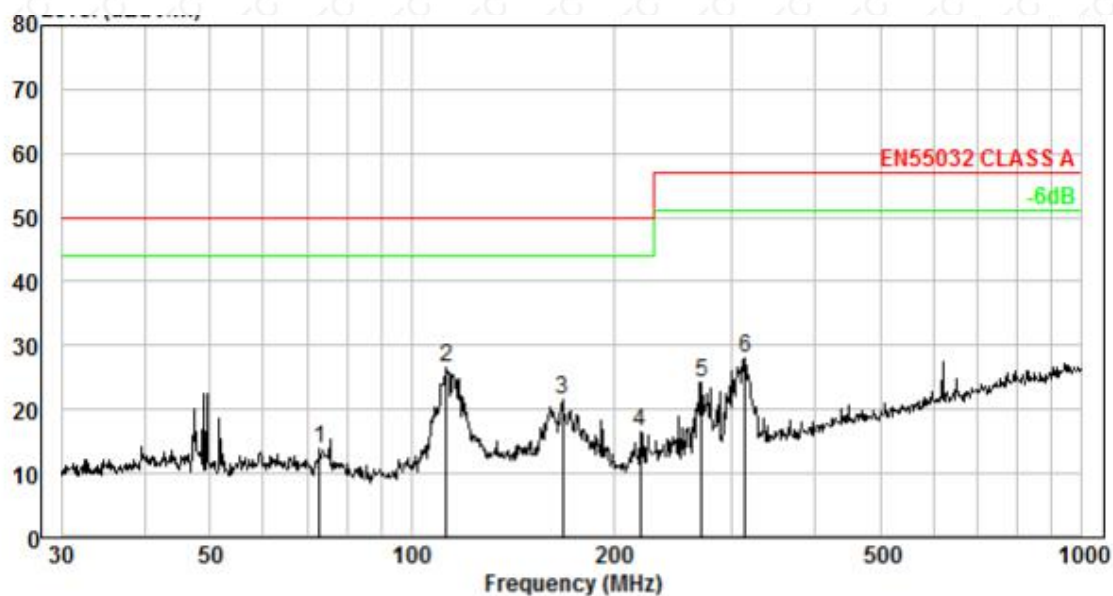

No.	Freq MHz	Cable Loss dB	ANT Factor dB/m	Receiver Reading dBuV	Preamp Factor dB	Emission Level dBuV/m	Limit dBuV/m	Over Limit dB	Remark
1.	72.847	2.73	9.92	31.36	30.28	13.73	50.00	-36.27	QP
2.	112.524	3.48	11.32	42.21	30.43	26.58	50.00	-23.42	QP
3.	167.824	4.16	13.45	34.49	30.57	21.53	50.00	-28.47	QP
4.	219.075	4.62	10.74	31.73	30.66	16.43	50.00	-33.57	QP
5.	270.375	4.98	12.49	37.52	30.73	24.26	57.00	-32.74	QP
6.	314.377	5.24	13.52	40.20	30.79	28.17	57.00	-28.83	QP

### 7.3. HARMONICS CURRENT MEASUREMENT

#### 7.3.1. LIMITS OF HARMONICS CURRENT MEASUREMENT

Limit for Class A equipment		Limit for Class D equipment		
Harmonics Order N	Max. permissible harmonics current A	Harmonics Order n	Max. permissible harmonics current per watt mA/W	Max. permissible harmonics current A
Odd harmonics		Odd Harmonics only		
3	2.30	3	3.4	2.30
5	1.14	5	1.9	1.14
7	0.77	7	1.0	0.77
9	0.40	9	0.5	0.40
11	0.33	11	0.35	0.33
13	0.21	13	0.30	0.21
$15 \leq n \leq 39$	$0.15 \times (15/n)$	$15 \leq n \leq 39$ (odd harmonics only)	$3.85/n$	$0.15 \times (15/n)$
Even harmonics				
2	1.08			
4	0.43			
6	0.30			
$8 \leq n \leq 40$	$0.23 \times 8/n$			

Limit for Class C equipment	
Harmonics Order n	Max. permissible harmonics current expressed as a percentage of the input current at the fundamental frequency A
2	2
3	$30 \times F$
5	10
7	7
9	5
$11 \leq n < \leq 39$ (odd harmonics only)	3

F is the circuit power factor

Note: Class A, B, C and D are classified according to item 7.3.2. of this report



### 7.3.2. TEST PROCEDURES

The EUT was placed on the top of a wooden table 0.8 meters above the ground and operated to produce the maximum harmonic. The classification of EUT is according to section 5 of EN 61000-3-2.

The EUT is classified as follows:

Class A:

Balanced three-phase equipment, Household appliances excluding equipment as Class D, Tools excluding portable tools, Dimmers for incandescent lamps, audio equipment, equipment not specified in one of the three other classes.

Class B:

Portable tools; Arc welding equipment which is not professional equipment.

Class C:


Lighting equipment

Class D:

Equipment having a specified power less than or equal to 600 W of the following types: Personal computers and personal computer monitors and television receivers.

The correspondent test program of test instrument to measure the current harmonics emanated from EUT is chosen. The measure time shall be not less than the time necessary for the EUT to be exercised.

### 7.3.3. TEST SETUP

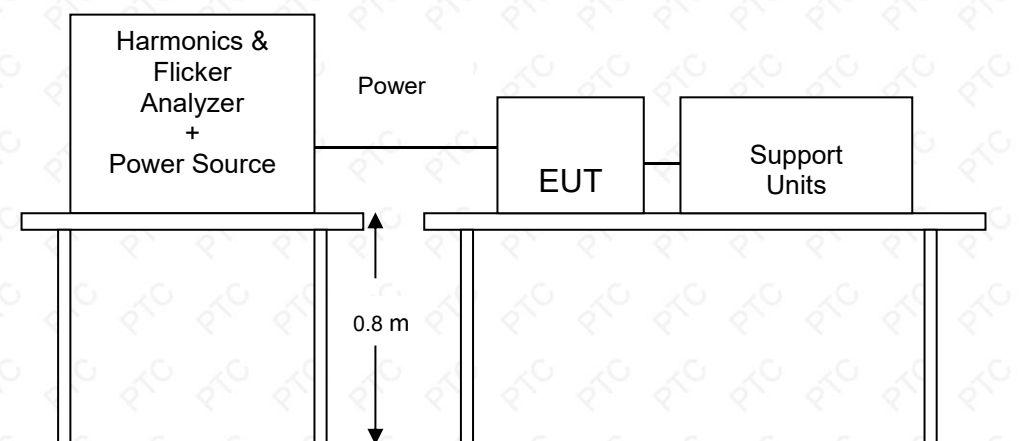

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

### 7.3.4. TEST RESULT



Report No.: PTC19061402901E-EM01

EUT: AC frequency conversion barrier gate M/N:D118 Tested by: Bob

Test category: Class-A per Ed. 4.0 (2014) (European limits) Test Margin: 100

Test date: 2019/7/19 Start time: 10:54:00 End time: 10:56:52


Test duration (min): 2.5 Data file name: H-000074.cts\_data

Comment: Working


Customer: Guangdong Ankuai Intelligent Technology Co.Ltd

Test Result: Pass Source qualification: Normal

Current & voltage waveforms

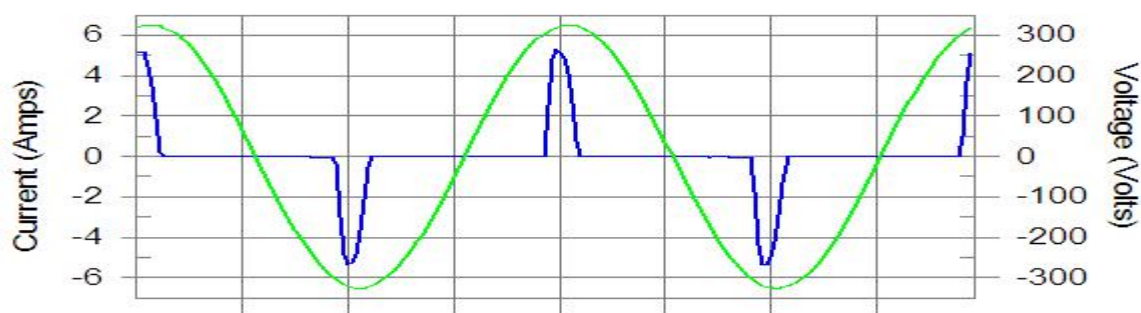

Harmonics and Class A limit line European Limits

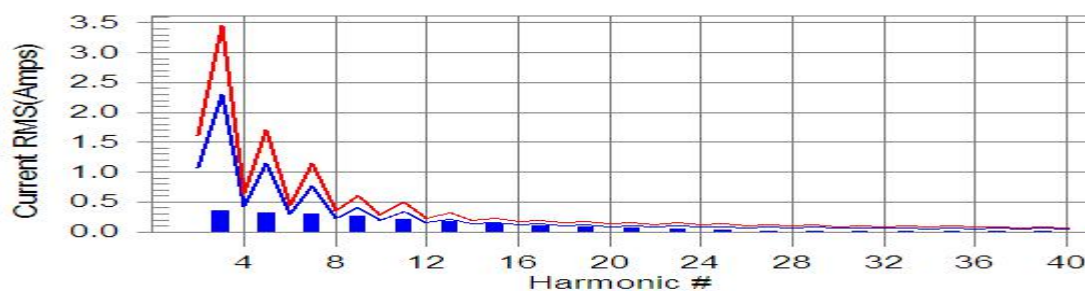

Test result: Pass Worst harmonic was #15 with 73.4% of the limit.





Report No.: PTC19061402901E-EM01

EUT: AC frequency conversion barrier gate M/N:D118 Tested by: Bob  
 Test category: Class-A per Ed. 4.0 (2014) (European limits) Test Margin: 100  
 Test date: 2019/7/19 Start time: 10:54:00 End time: 10:56:52  
 Test duration (min): 2.5 Data file name: H-000074.cts\_data  
 Comment: Working  
 Customer: Guangdong Ankuai Intelligent Technology Co.Ltd

Test Result: Pass Source qualification: Normal  
 THCA: 0.710 I-THD(%): 192.9 POHC(A): 0.090 POHC Limit(A): 0.251

Highest parameter values during test:

V\_RMS (Volts): 230.17 Frequency(Hz): 50.00  
 I\_Peak (Amps): 5.475 I\_RMS (Amps): 1.553  
 I\_Fund (Amps): 0.771 Crest Factor: 11.986  
 Power (Watts): 176.0 Power Factor: 0.545

Harm#	Harms(avg)	100%Limit	%of Limit	Harms(max)	150%Limit	%of Limit	Status
2	0.003	1.080	N/A	0.006	1.620	N/A	Pass
3	0.349	2.300	15.2	0.716	3.450	20.7	Pass
4	0.002	0.430	N/A	0.006	0.645	N/A	Pass
5	0.325	1.140	28.5	0.626	1.710	36.6	Pass
6	0.002	0.300	N/A	0.005	0.450	N/A	Pass
7	0.294	0.770	38.2	0.510	1.155	44.2	Pass
8	0.002	0.230	N/A	0.005	0.345	N/A	Pass
9	0.258	0.400	64.6	0.384	0.600	64.0	Pass
10	0.002	0.184	N/A	0.004	0.276	N/A	Pass
11	0.219	0.330	66.3	0.304	0.495	61.3	Pass
12	0.001	0.153	N/A	0.004	0.230	N/A	Pass
13	0.178	0.210	84.7	0.224	0.315	71.1	Pass
14	0.001	0.131	N/A	0.003	0.197	N/A	Pass
15	0.138	0.150	92.2	0.165	0.225	73.4	Pass
16	0.001	0.115	N/A	0.003	0.173	N/A	Pass
17	0.103	0.132	78.3	0.129	0.198	65.2	Pass
18	0.001	0.102	N/A	0.002	0.153	N/A	Pass
19	0.078	0.118	65.6	0.101	0.178	56.7	Pass
20	0.001	0.092	N/A	0.002	0.138	N/A	Pass
21	0.059	0.107	55.5	0.076	0.161	47.6	Pass
22	0.001	0.084	N/A	0.002	0.125	N/A	Pass
23	0.044	0.098	45.2	0.056	0.147	38.3	Pass
24	0.001	0.077	N/A	0.002	0.115	N/A	Pass
25	0.031	0.090	34.0	0.050	0.135	36.7	Pass
26	0.001	0.071	N/A	0.002	0.107	N/A	Pass
27	0.019	0.083	23.2	0.043	0.125	34.6	Pass
28	0.001	0.066	N/A	0.002	0.099	N/A	Pass
29	0.013	0.078	16.3	0.034	0.116	28.9	Pass
30	0.001	0.061	N/A	0.002	0.092	N/A	Pass
31	0.012	0.073	16.9	0.028	0.109	25.4	Pass
32	0.001	0.058	N/A	0.001	0.086	N/A	Pass
33	0.015	0.068	21.8	0.029	0.102	28.5	Pass
34	0.001	0.054	N/A	0.001	0.081	N/A	Pass
35	0.017	0.064	25.8	0.024	0.096	25.2	Pass
36	0.001	0.051	N/A	0.001	0.077	N/A	Pass
37	0.017	0.061	27.6	0.021	0.091	23.5	Pass
38	0.001	0.048	N/A	0.001	0.073	N/A	Pass
39	0.015	0.058	26.5	0.020	0.087	23.7	Pass
40	0.001	0.046	N/A	0.001	0.069	N/A	Pass





Report No.: PTC19061402901E-EM01

EUT: AC frequency conversion barrier gate M/N:D118      Tested by: Bob  
Test category: Class-A per Ed. 4.0 (2014) (European limits)      Test Margin: 100  
Test date: 2019/7/19      Start time: 10:54:00      End time: 10:56:52  
Test duration (min): 2.5      Data file name: H-000074.cts\_data  
Comment: Working  
Customer: Guangdong Ankuai Intelligent Technology Co.Ltd

Test Result: Pass      Source qualification: Normal

Highest parameter values during test:

Voltage (Vrms):	230.17	Frequency(Hz):	50.00
I_Peak (Amps):	5.475	I_RMS (Amps):	1.553
I_Fund (Amps):	0.771	Crest Factor:	11.986
Power (Watts):	176.0	Power Factor:	0.545

Harm#	Harmonics	V-rms	Limit V-rms	% of Limit	Status
2		0.073	0.460	15.80	OK
3		0.413	2.071	19.92	OK
4		0.041	0.460	8.85	OK
5		0.111	0.920	12.11	OK
6		0.019	0.460	4.22	OK
7		0.120	0.690	17.41	OK
8		0.014	0.460	3.04	OK
9		0.144	0.460	31.30	OK
10		0.016	0.460	3.50	OK
11		0.135	0.230	58.66	OK
12		0.007	0.230	3.26	OK
13		0.113	0.230	49.02	OK
14		0.008	0.230	3.67	OK
15		0.096	0.230	41.92	OK
16		0.011	0.230	4.88	OK
17		0.085	0.230	36.95	OK
18		0.008	0.230	3.67	OK
19		0.078	0.230	34.07	OK
20		0.013	0.230	5.72	OK
21		0.066	0.230	28.57	OK
22		0.007	0.230	2.87	OK
23		0.055	0.230	24.11	OK
24		0.007	0.230	3.16	OK
25		0.057	0.230	24.86	OK
26		0.008	0.230	3.30	OK
27		0.052	0.230	22.55	OK
28		0.005	0.230	2.36	OK
29		0.040	0.230	17.34	OK
30		0.006	0.230	2.63	OK
31		0.034	0.230	14.85	OK
32		0.006	0.230	2.41	OK
33		0.031	0.230	13.57	OK
34		0.005	0.230	2.07	OK
35		0.034	0.230	14.80	OK
36		0.005	0.230	2.17	OK
37		0.036	0.230	15.47	OK
38		0.004	0.230	1.86	OK
39		0.036	0.230	15.44	OK
40		0.011	0.230	4.93	OK

## 7.4. VOLTAGE FLUCTUATION AND FLICKS MEASUREMENT

### 7.4.1. LIMITS OF VOLTAGE FLUCTUATION AND FLICKS MEASUREMENT


TEST ITEM	LIMIT	REMARK
$P_{st}$	1.0	$P_{st}$ means short-term flicker indicator.
$P_{lt}$	0.65	$P_{lt}$ means long-term flicker indicator.
$T_{dt}$ (ms)	500	$T_{dt}$ means maximum time that dt exceeds 3 %.
$d_{max}$ (%)	4/6/7 %	$d_{max}$ means maximum relative voltage change.
dc (%)	3.3 %	dc means relative steady-state voltage change

### 7.4.2. TEST PROCEDURE

The EUT was placed on the top of a wooden table 0.8 meters above the ground and operated to produce the most unfavorable sequence of voltage changes under full load operating conditions.

During the flick measurement, the measure time shall include that part of whole operation cycle in which the EUT produce the most unfavorable sequence of voltage changes. The observation period for short-term flicker indicator is 10 minutes and the observation period for long-term flicker indicator is 2 hours.

### 7.4.3. TEST SETUP

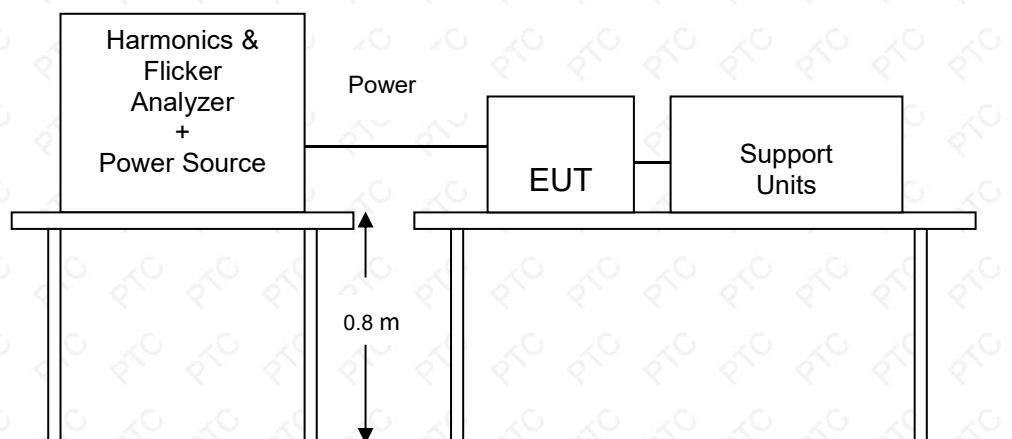

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

### 7.4.4. TEST RESULT

<b>Product</b>	AC frequency conversion barrier gate	<b>Tested by</b>	Yang
<b>Model</b>	D118	<b>Observation Period (Tp)</b>	10 mins
<b>Test Mode</b>	Working	<b>Test Result</b>	Pass
<b>Environmental Conditions</b>	24.2°C, 54.5 % RH, 101.1 kPa		



Please refer to the following test data:

EUT: AC frequency conversion barrier gate M/N:D118 Tested by: Bob

Test category: All parameters (European limits) Test Margin: 100

Test date: 2019/7/19 Start time: 11:24:20 End time: 11:34:52

Test duration (min): 10 Data file name: F-000077.cts\_data


Comment: Working

Customer: Guangdong Ankuai Intelligent Technology Co.Ltd


Test Result: Pass Status: Test Completed

Pst and limit line

European Limits

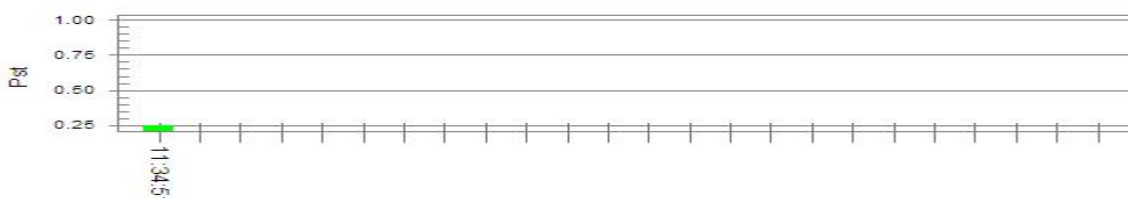

Plt and limit line

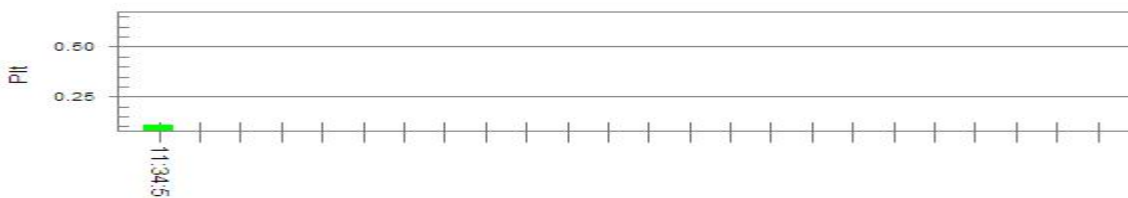

Parameter values recorded during the test:

Vrms at the end of test (Volt): 230.14

Highest dt (%): 0.00

Test limit (%): N/A N/A

T-max (mS): 0

Test limit (mS): 500.0 Pass

Highest dc (%): 0.00

Test limit (%): 3.30 Pass

Highest dmax (%): 0.04

Test limit (%): 4.00 Pass

Highest Pst (10 min. period): 0.247

Test limit: 1.000 Pass

Highest Plt (2 hr. period): 0.108

Test limit: 0.650 Pass



## 8. IMMUNITY TEST

### 8.1. GENERAL DESCRIPTION

Product Standard	EN 55024	
	Test Type	Minimum Requirement
<b>Basic Standard, Specification, and Performance Criterion required</b>	EN 61000-4-2	Electrostatic Discharge – ESD: ±8 kV air discharge, ±4 kV Contact discharge, Performance Criterion B
	EN 61000-4-3	Radio-Frequency Electromagnetic Field Susceptibility Test – RS: 80 MHz to 1 GHz, 3 V/m, 80 % AM(1 kHz), Performance Criterion A
	EN 61000-4-4	Electrical Fast Transient/Burst - EFT, Power line: ±1 kV, Signal line: ±0.5 kV, Performance Criterion B
	EN 61000-4-5	Surge Immunity Test: 1.2/50 µs Open Circuit Voltage, 8 /20 µs Short Circuit Current, Power Port ~ Line to line: ±1 kV, Line to ground: ±2 kV Signal Port : ±0.5 kV Performance Criterion B
	EN 61000-4-6	Conducted Radio Frequency Disturbances Test –CS: 0.15 ~ 80 MHz, 3 V r.m.s, 80 % AM, 1 kHz, Performance Criterion A
	EN 61000-4-8	Power frequency magnetic field immunity test 50 Hz, 1 A/m Performance Criterion A
	EN 61000-4-11	Voltage Dips: i) 0% reduction for 0.5 period, Performance Criterion B ii) 70% reduction for 25 periods, Performance Criterion C Voltage Interruptions: 0% reduction for 250 periods, Performance Criterion C



## 8.2. GENERAL PERFORMANCE CRITERIA DESCRIPTION

<b>Criteria A:</b>	During and after the test the EUT shall continue to operate as intended without operator intervention. No degradation of performance or loss of function is allowed below a minimum performance level specified by the manufacturer when the EUT is used as intended. The performance level may be replaced by a permissible loss of performance. If the minimum performance level or the permissible performance loss is not specified by the manufacturer, then either of these may be derived from the product description and documentation, and by what the user may reasonably expect from the EUT if used as intended.
<b>Criteria B:</b>	<p>After the test, the EUT shall continue to operate as intended without operator intervention. No degradation of performance or loss of function is allowed, after the application of the phenomena below a performance level specified by the manufacturer, when the EUT is used as intended. The performance level may be replaced by a permissible loss of performance.</p> <p>During the test, degradation of performance is allowed. However, no change of operating state or stored data is allowed to persist after the test. If the minimum performance level (or the permissible performance loss) is not specified by the manufacturer, then either of these may be derived from the product description and documentation, and by what the user may reasonably expect from the EUT if used as intended.</p>
<b>Criteria C:</b>	<p>During and after testing, a temporary loss of function is allowed, provided the function is self-recoverable, or can be restored by the operation of the controls or cycling of the power to the EUT by the user in accordance with the manufacturer's instructions.</p> <p>Functions, and/or information stored in non-volatile memory, or protected by a battery backup, shall not be lost.</p>

### 8.3. ELECTROSTATIC DISCHARGE (ESD)

#### 8.3.1. TEST SPECIFICATION

<b>Basic Standard:</b>	EN 61000-4-2
<b>Discharge Impedance:</b>	330 $\Omega$
<b>Charging Capacity:</b>	150 pF
<b>Discharge Voltage:</b>	Air Discharge: $\pm 8$ kV (Direct) Contact Discharge: $\pm 4$ kV (Direct/Indirect)
<b>Polarity:</b>	Positive & Negative
<b>Number of Discharge:</b>	10 (Air discharge for single polarity discharge) 25 (Contact discharge for single polarity discharge)
<b>Discharge Mode:</b>	1 time/s
<b>Performance Criterion:</b>	B

#### 8.3.2. TEST PROCEDURE

The discharges shall be applied in two ways:

- Contact discharges to the conductive surfaces and coupling planes:  
50 dischargers (25 with positive and 25 with negative polarity) shall be applied on each accessible metallic part of the enclosure, terminals are excluded. In case of a non-conductive enclosure, dischargers shall be applied on the horizontal or vertical coupling planes. Test shall be performed at a maximum repetition rate of one discharge per second.
- Air discharges at slots and apertures and insulating surfaces:  
On those parts of the EUT where it is not possible to perform contact discharge testing, the equipment should be investigated to identify user accessible points where breakdown may occur. Such points are tested using the air discharge method. This investigation should be restricted to those area normally handled by the user. A minimum of 10 single air discharges shall be applied to the selected test point for each such area.

The basic test procedure was in accordance with IEC 61000-4-2:


- The EUT was located 0.1 m minimum from all side of the HCP (dimensions 1.6 m x 0.8 m).
- The support units were located another table 30 cm away from the EUT, but direct support unit was/were located at same location as EUT on the HCP and keep at a distance of 10cm with EUT.





- c) The time interval between two successive single discharges was at least 1 second.
- d) Contact discharges were applied to the non-insulating coating, with the pointed tip of the generator penetrating the coating and contacting the conducting substrate.
- e) Air discharges were applied with the round discharge tip of the discharge electrode approaching the EUT as fast as possible (without causing mechanical damage) to touch the EUT. After each discharge, the ESD generator was removed from the EUT and re-triggered for a new single discharge. The test was repeated until all discharges were complete.
- f) At least ten single discharges (in the most sensitive polarity) were applied at the front edge of each HCP opposite the center point of each unit of the EUT and 0.1 meter from the front of the EUT. The long axis of the discharge electrode was in the plane of the HCP and perpendicular to its front edge during the discharge.
- g) At least ten single discharges (in the most sensitive polarity) were applied to the center of one vertical edge of the Vertical Coupling Plane (VCP) in sufficiently different positions that the four faces of the EUT were completely illuminated. The VCP (dimensions 0.5 m x 0.5 m) was placed vertically to and 0.1 meter from the EUT.

### 8.3.3. TEST SETUP

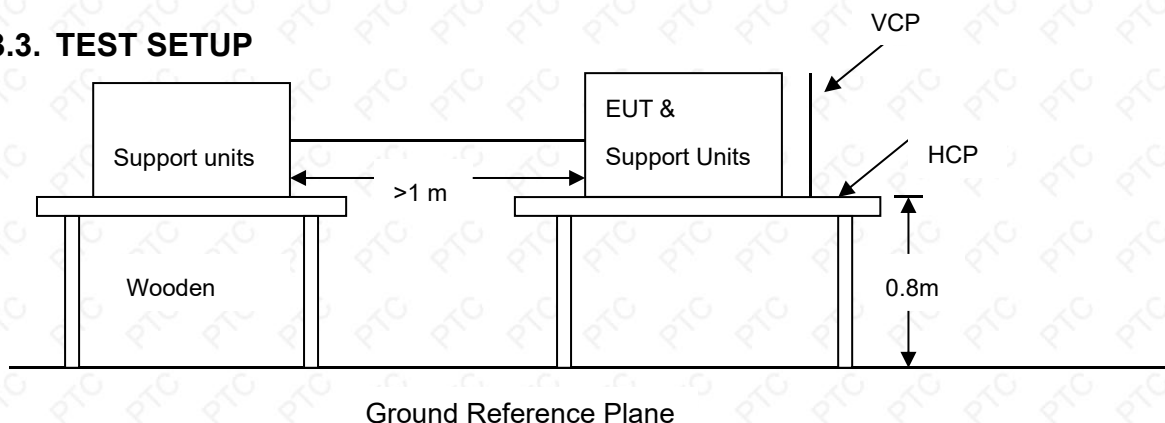

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

#### Note:

##### 1) TABLE-TOP EQUIPMENT

The configuration consisted of a wooden table 0.8 meters high standing on the ground reference plane (GRP). The GRP consisted of a sheet of aluminum at least 0.25 mm thick, and 2.5 meters square connected to the protective grounding system. A horizontal coupling plane (HCP) (1.6 m x 0.8 m) was placed on the table and attached to the GRP by means of a cable with 940k total impedance. The equipment under test, was installed in a representative system as described in section 7 of EN 61000-4-2, and its cables were placed on the HCP and isolated by an insulating support of 0.5 mm thickness. A distance of 1-meter minimum was provided between the EUT and the walls of the laboratory and any other metallic structure.

##### 2) FLOOR-STANDING EQUIPMENT

The equipment under test was installed in a representative system as described in section 7 of IEC 61000-4-2, and its cables were isolated from the ground reference plane by an insulating support of 0.1 meter thickness. The GRP consisted of a sheet of aluminum that is at least 0.25 mm thick, and 2.5 meters square connected to the protective grounding system and extended at least 0.5 meters from the EUT on all sides.



### 8.3.4. TEST RESULT

<b>Product</b>	AC frequency conversion barrier gate	<b>Environmental Conditions</b>	24.2°C, 54.5 % RH, 101.1 kPa
<b>Model</b>	D118	<b>Tested By</b>	Yang
<b>Test mode</b>	Working	<b>Test Result</b>	Pass

Air Discharge					
Test Points	Test Levels	Results			
	± 8 kV	Pass	Fail	Observation	Performance Criterion
Slot 4 Points	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	Note <input type="checkbox"/> 1 <input checked="" type="checkbox"/> 2 <input type="checkbox"/> 3	B
Button 7 Points	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	Note <input type="checkbox"/> 1 <input checked="" type="checkbox"/> 2 <input type="checkbox"/> 3	B

Contact Discharge					
Test Points	Test Levels	Results			
	± 4 kV	Pass	Fail	Observation	Performance Criterion
HCP 4 Points	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	Note <input type="checkbox"/> 1 <input checked="" type="checkbox"/> 2 <input type="checkbox"/> 3	B
VCP 4 Points	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	Note <input type="checkbox"/> 1 <input checked="" type="checkbox"/> 2 <input type="checkbox"/> 3	B

Note: 1) There was no change compared with initial operation during the test.  
2) During the test the luminous intensity change, and after the test the luminous intensity can be restored to its initial value within 1 min.  
3) During the test, the luminous intensity change and after the test the luminous intensity can return to normal within 30 min.



## 8.4. RADIATED, RADIO-FREQUENCY, ELECTROMAGNETIC FIELD (RS)

### 8.4.1. TEST SPECIFICATION


<b>Basic Standard:</b>	EN 61000-4-3
<b>Frequency Range:</b>	80 MHz ~ 1000 MHz
<b>Field Strength:</b>	3 V/m
<b>Modulation:</b>	1 kHz Sine Wave, 80 %, AM Modulation
<b>Frequency Step:</b>	1 % of preceding frequency value
<b>Polarity of Antenna:</b>	Horizontal and Vertical
<b>Test Distance:</b>	3 m
<b>Antenna Height:</b>	1.5 m
<b>Performance Criterion:</b>	A

### 8.4.2. TEST PROCEDURE

The test procedure was in accordance with EN 61000-4-3

- The testing was performed in a fully anechoic chamber. The transmit antenna was located at a distance of 3 meters from the EUT.
- The frequency range is swept from 80 MHz to 1000 MHz, with the signal 80% amplitude modulated with a 1 kHz sine-wave. The rate of sweep did not exceed  $1.5 \times 10^{-3}$  decade/s, where the frequency range is swept incrementally, the step size was 1 % of preceding frequency value.
- The dwell time at each frequency shall be not less than the time necessary for the EUT to be able to respond.
- The test was performed with the EUT exposed to both vertically and horizontally polarized fields on each of the four sides.

### 8.4.3. TEST SETUP

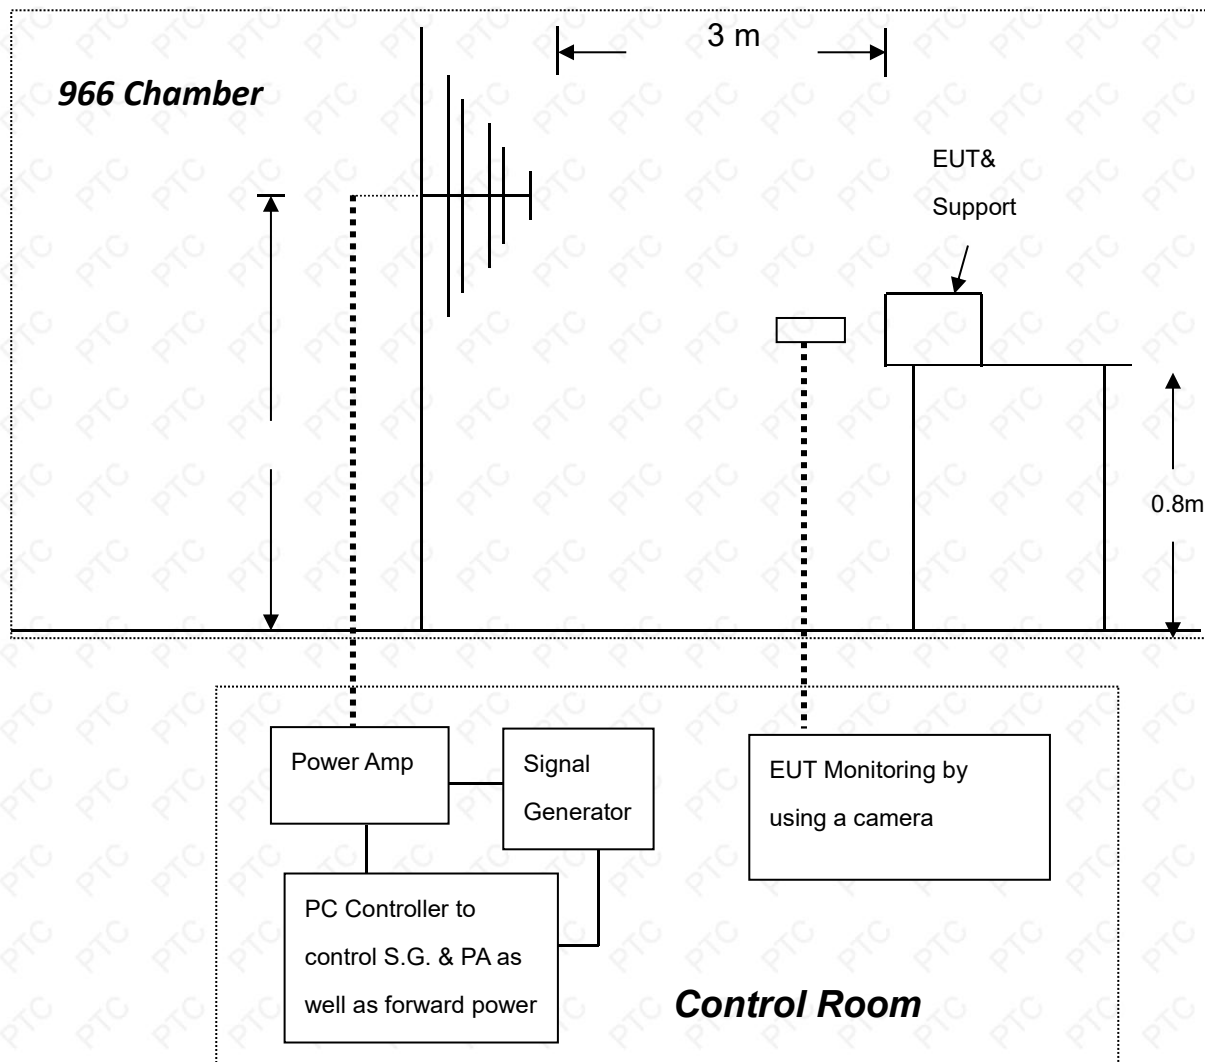

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

Note:

#### TABLETOP EQUIPMENT

The EUT installed in a representative system as described in section 7 of EN 61000-4-3 was placed on a non-conductive table 0.8 meters in height. The system under test was connected to the power and signal wire according to relevant installation instructions.

#### FLOOR STANDING EQUIPMENT

The EUT installed in a representative system as described in section 7 of IEC 61000-4-3 was placed on a non-conductive wood support 0.1 meters in height. The system under test was connected to the power and signal wire according to relevant installation instructions.



#### 8.4.4. TEST RESULT

<b>Product</b>	AC frequency conversion barrier gate	<b>Environmental Conditions</b>	24.2℃, 54.5 % RH, 101.1 kPa
<b>Model</b>	D118	<b>Tested By</b>	Yang
<b>Test mode</b>	Working	<b>Test Result</b>	Pass

Frequency (MHz)	Polarity	Position	Field Strength (V/m)	Observation	Performance Criterion
80 ~ 1000	V&H	Front	3	Note <input checked="" type="checkbox"/> 1 <input type="checkbox"/> 2 <input type="checkbox"/> 3	A
80 ~ 1000	V&H	Rear	3	Note <input checked="" type="checkbox"/> 1 <input type="checkbox"/> 2 <input type="checkbox"/> 3	A
80 ~ 1000	V&H	Left	3	Note <input checked="" type="checkbox"/> 1 <input type="checkbox"/> 2 <input type="checkbox"/> 3	A
80 ~ 1000	V&H	Right	3	Note <input checked="" type="checkbox"/> 1 <input type="checkbox"/> 2 <input type="checkbox"/> 3	A

Note: 1) There was no change compared with initial operation during the test.

2) During the test the luminous intensity change ,and after the test the luminous intensity can be restored to its initial value within 1 min.

3) During the test, the luminous intensity change and after the test the luminous intensity can return to normal within 30 min.



## 8.5. ELECTRICAL FAST TRANSIENT (EFT)

### 8.5.1. TEST SPECIFICATION

<b>Basic Standard:</b>	EN 61000-4-4
<b>Test Voltage:</b>	Power Line: $\pm 1$ kV Signal/Control Line: $\pm 0.5$ kV
<b>Polarity:</b>	Positive & Negative
<b>Impulse Frequency:</b>	5 kHz
<b>Impulse Wave-shape:</b>	5/50 ns
<b>Burst Duration:</b>	15 ms
<b>Burst Period:</b>	300 ms
<b>Test Duration:</b>	2 mins
<b>Performance Criterion:</b>	B

### 8.5.2. TEST PROCEDURE

EUT is placed on a 0.1 m tall wooden table.

EUT operate at normal mode, the transient/burst was 5/50 ns in accordance with EN 61000-4-4, both positive and negative polarity burst waveform were applied.

The duration time of each test line was 2 minutes.

### 8.5.3. TEST SETUP

The EUT installed in a representative system as described in section 7 of EN 61000-4-4.

For the actual test configuration, please refer to the related item – photographs of the test configuration.



#### 8.5.4. TEST RESULT

<b>Product</b>	AC frequency conversion barrier gate	<b>Environmental Conditions</b>	24.2°C, 54.5 % RH, 101.1 kPa
<b>Model</b>	D118	<b>Tested By</b>	Yang
<b>Test mode</b>	Working	<b>Test Result</b>	Pass

Test Point	Polarity	Test Level (kV)	Observation	Performance Criterion
L	+/-	1	Note <input type="checkbox"/> 1 <input checked="" type="checkbox"/> 2 <input type="checkbox"/> 3	B
N	+/-	1	Note <input type="checkbox"/> 1 <input checked="" type="checkbox"/> 2 <input type="checkbox"/> 3	B
L – N	+/-	1	Note <input type="checkbox"/> 1 <input checked="" type="checkbox"/> 2 <input type="checkbox"/> 3	B
PE	+/-	1	Note <input type="checkbox"/> 1 <input checked="" type="checkbox"/> 2 <input type="checkbox"/> 3	N/A
L – PE	+/-	1	Note <input type="checkbox"/> 1 <input checked="" type="checkbox"/> 2 <input type="checkbox"/> 3	N/A
N – PE	+/-	1	Note <input type="checkbox"/> 1 <input checked="" type="checkbox"/> 2 <input type="checkbox"/> 3	N/A
L – N – PE	+/-	1	Note <input type="checkbox"/> 1 <input checked="" type="checkbox"/> 2 <input type="checkbox"/> 3	N/A
RJ45 UTP cable	--	--	N/A	N/A

Note: 1) There was no change compared with initial operation during the test.

2) During the test the luminous intensity change ,and after the test the luminous intensity can be restored to its initial value within 1 min.

3) During the test, the luminous intensity change and after the test the luminous intensity can return to normal within 30 min.

## 8.6. SURGE IMMUNITY TEST

### 8.6.1. TEST SPECIFICATION

<b>Basic Standard:</b>	EN 61000-4-5
<b>Wave-Shape:</b>	Combination Wave 1.2/50 $\mu$ s Open Circuit Voltage 8/20 $\mu$ s Short Circuit Current
<b>Test Voltage:</b>	Power Port ~ Line to line: $\pm 1$ kV, Line to ground: $\pm 2$ kV
<b>Surge Input/Output:</b>	Power Line: L-N / L-PE / N-PE
<b>Generator Source Impedance:</b>	2 $\Omega$ between networks 12 $\Omega$ between network and ground
<b>Polarity:</b>	Positive/Negative
<b>Phase Angle:</b>	0° /90° /180° /270°
<b>Pulse Repetition Rate:</b>	1 time / min
<b>Number of Tests:</b>	5 positive polarity pulses, and 5 negative polarity pulses
<b>Performance Criterion:</b>	B

### 8.6.2. TEST PROCEDURE


EUT is placed on a 0.8 m tall wooden table.

EUT operate at normal mode, two types of combination wave generator (1.2/50  $\mu$ s open-circuit voltage and 8/20  $\mu$ s short-circuit current) are applied to the EUT power supply terminals via the capacitive coupling network.

The power cord between the EUT and the coupling/decoupling network shall not exceed 2 m in length.



### 8.6.3. TEST SETUP

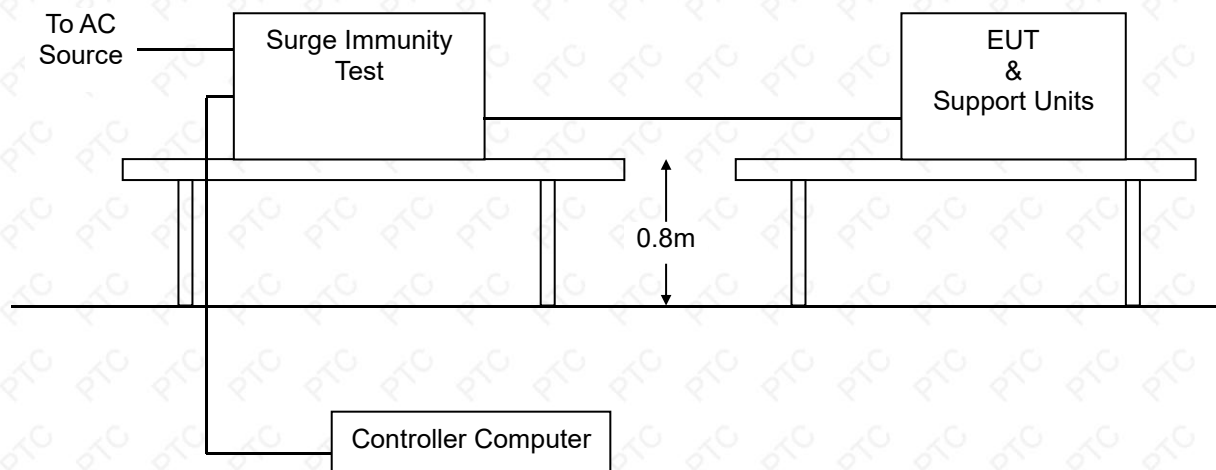

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

### 8.6.4. TEST RESULT

<b>Product</b>	AC frequency conversion barrier gate	<b>Environmental Conditions</b>	24.2°C, 54.5 % RH, 101.1 kPa
<b>Model</b>	D118	<b>Tested By</b>	Yang
<b>Test mode</b>	Working	<b>Test Result</b>	Pass

Test Point	Polarity	Test Level (kV)	Observation	Performance Criterion
L - N	+/-	1	Note <input type="checkbox"/> 1 <input checked="" type="checkbox"/> 2 <input type="checkbox"/> 3	B
L - PE	+/-	2	Note <input type="checkbox"/> 1 <input checked="" type="checkbox"/> 2 <input type="checkbox"/> 3	N/A
N - PE	+/-	2	Note <input type="checkbox"/> 1 <input checked="" type="checkbox"/> 2 <input type="checkbox"/> 3	N/A

Note: 1) There was no change compared with initial operation during the test.

2) During the test the luminous intensity change ,and after the test the luminous intensity can be restored to its initial value within 1 min.

3) During the test, the luminous intensity change and after the test the luminous intensity can return to normal within 30 min.

## 8.7. CONDUCTED RADIO FREQUENCY DISTURBANCES (CS)

### 8.7.1. TEST SPECIFICATION

<b>Basic Standard:</b>	EN 61000-4-6
<b>Frequency Range:</b>	0.15 MHz ~80 MHz
<b>Field Strength:</b>	3 V
<b>Modulation:</b>	1 kHz Sine Wave, 80 %, AM Modulation
<b>Frequency Step:</b>	1 % of preceding frequency value
<b>Coupled cable:</b>	Power Mains, Shielded
<b>Coupling device:</b>	CDN-M3/2 (3 wires/2 wires)
<b>Performance Criterion:</b>	A


### 8.7.2. TEST PROCEDURE

The EUT shall be tested within its intended operating and climatic conditions.

The test shall performed with the test generator connected to each of the coupling and decoupling devices in turn, while the other non-excited RF input ports of the coupling devices are terminated by a 50  $\Omega$  load resistor.

The frequency range was swept from 150 kHz to 80 MHz, using the signal level established during the setting process and with a disturbance signal of 80 % amplitude. The signal was modulated with a 1 kHz sine wave, pausing to adjust the RF signal level or the switch coupling devices as necessary. The sweep rate was  $1.5 \times 10^{-3}$  decades/s. Where the frequency range is swept incrementally, the step size was 1 % of preceding frequency value the dwell time of the amplitude modulated carrier at each frequency was 0.5 s.

### 8.7.3. TEST SETUP

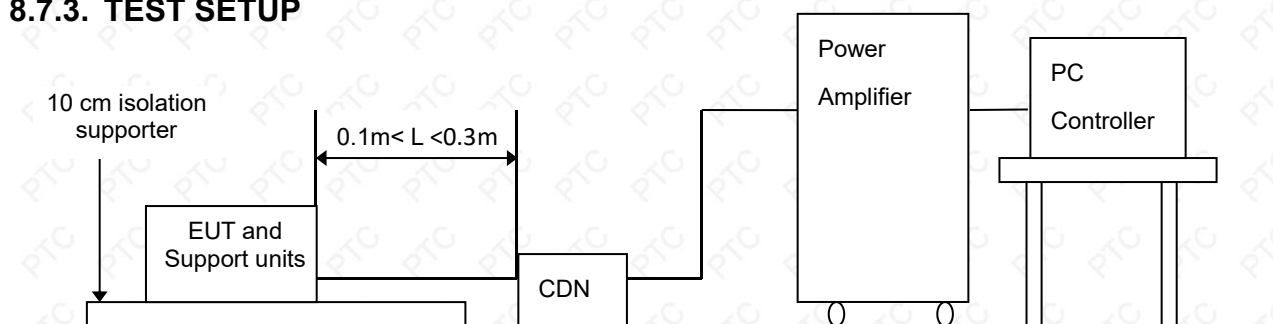

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration

Note: 1) The EUT is setup 0.1 m above Ground Reference Plane

- 2) All relevant cables shall be provided with the appropriate coupling and decoupling devices at a distance between 0.1 meters and 0.3 meters from the projected geometry of the EUT on the ground reference plane.

**8.7.4. TEST RESULT**

<b>Product</b>	AC frequency conversion barrier gate	<b>Environmental Conditions</b>	24.2℃, 54.5 % RH, 101.1 kPa
<b>Model</b>	D118	<b>Tested By</b>	Yang
<b>Test mode</b>	Working	<b>Test Result</b>	Pass

<b>Frequency (MHz)</b>	<b>Field Strength (Vrms)</b>	<b>Injected Position</b>	<b>Injection Method</b>	<b>Observation</b>	<b>Performance Criterion</b>
0.15 ~ 80	3	AC Mains	CDN-M2/M3	Note <input checked="" type="checkbox"/> 1 <input type="checkbox"/> 2 <input type="checkbox"/> 3	A

Note: 1) There was no change compared with initial operation during the test.

2) During the test the luminous intensity change ,and after the test the luminous intensity can be restored to its initial value within 1 min.

3) During the test, the luminous intensity change and after the test the luminous intensity can return to normal within 30 min.



## 8.8. POWER FREQUENCY MAGNETIC FIELD

### 8.8.1. TEST SPECIFICATION

<b>Basic Standard:</b>	EN 61000-4-8
<b>Frequency Range:</b>	50 Hz
<b>Field Strength:</b>	1 A/m
<b>Observation Time:</b>	5 minutes
<b>Inductance Coil:</b>	Rectangular type, 1 m x 1 m
<b>Performance Criterion:</b>	A

### 8.8.2. TEST PROCEDURE


The equipment is configured and connected to satisfy its functional requirements. It shall be placed on the GRP with the interposition of a 0.1 m-thick insulating support.

The equipment cabinets shall be connected to the safety earth directly on the GRP via the earth terminal of the EUT.

The power supply, input and output circuits shall be connected to the sources of power supply, control and signal.

The cables supplied or recommended by the equipment manufacturer shall be used. 1 meter of all cables used shall be exposed to the magnetic field.

### 8.8.3. TEST SETUP

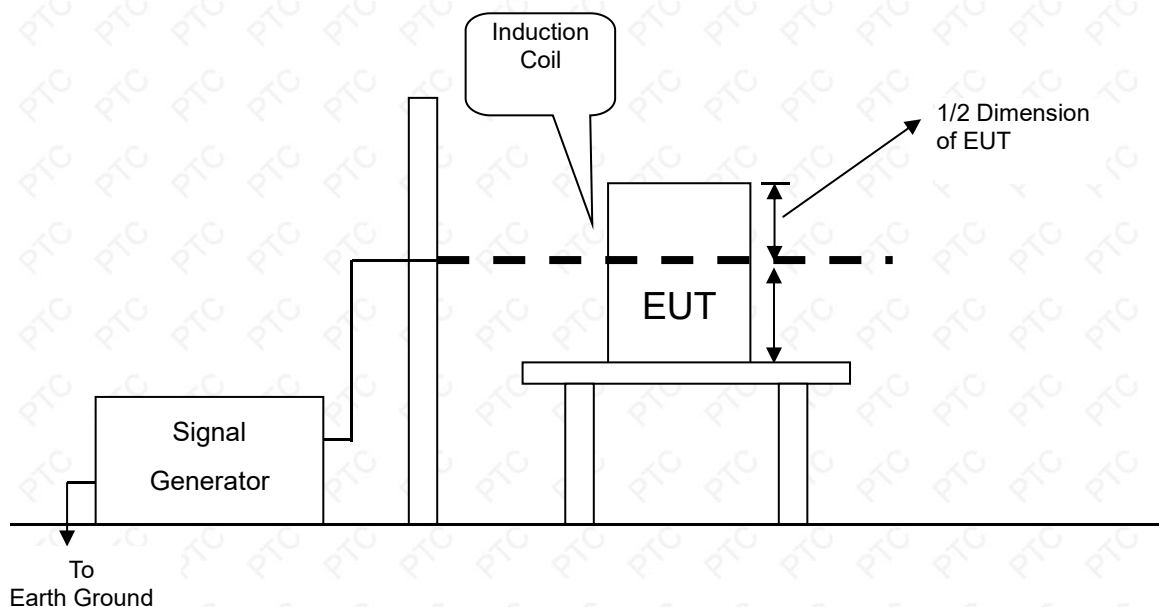

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration  
Note:

#### TABLETOP EQUIPMENT

The equipment shall be subjected to the test magnetic field by using the induction coil of standard dimension (1 m x 1 m). The induction coil shall then be rotated by 90 degrees in order to expose the EUT to the test field with different orientations.

#### FLOOR-STANDING EQUIPMENT

The equipment shall be subjected to the test magnetic field by using induction coils of suitable dimensions. The test shall be repeated by moving and shifting the induction coils, in order to test the whole volume of the EUT for each orthogonal direction. The test shall be repeated with the coil shifted to different positions along the side of the EUT, in steps corresponding to 50 % of the shortest side of the coil. The induction coil shall then be rotated by 90 degrees in order to expose the EUT to the test field with different orientations.



#### 8.8.4. TEST RESULT

<b>Product</b>	AC frequency conversion barrier gate	<b>Environmental Conditions</b>	24.2°C, 54.5 % RH, 101.1 kPa
<b>Model</b>	D118	<b>Tested By</b>	Yang
<b>Test mode</b>	Working	<b>Test Result</b>	Pass

Antenna aspect	Duration (min)	Field Strength (A/m)	Observation	Performance Criterion
X	5 min	1	Note <input checked="" type="checkbox"/> 1 <input type="checkbox"/> 2 <input type="checkbox"/> 3	A
Y	5 min	1	Note <input checked="" type="checkbox"/> 1 <input type="checkbox"/> 2 <input type="checkbox"/> 3	A
Z	5 min	1	Note <input checked="" type="checkbox"/> 1 <input type="checkbox"/> 2 <input type="checkbox"/> 3	A

The test only applies to apparatus containing device susceptible to magnetic fields, such as hall elements or magnetic field sensor, so this item isn't applicable to the products.



## 8.9. VOLTAGE DIP & VOLTAGE INTERRUPTIONS

### 8.9.1. TEST SPECIFICATION

<b>Basic Standard:</b>	EN 61000-4-11
<b>Test Duration Time:</b>	3 test events in sequence
<b>Interval Between Event:</b>	10 seconds
<b>Phase Angle:</b>	0°
<b>Test Cycle:</b>	3 times
<b>Performance Criterion:</b>	0% $U_T$ / 0.5 P, Criterion: B 70% $U_T$ / 25 P, Criterion: C 0% $U_T$ / 250 P, Criterion: C

### 8.9.2. TEST PROCEDURE


The EUT and support units were located on a wooden table, 0.8 m away from ground floor.

Setting the parameter of tests and then perform the test software of test simulator.

Changes to the voltage level shall occur at 0 degree crossing point in the a.c. voltage waveform.

Record the test result in test record form.

### 8.9.3. TEST SETUP

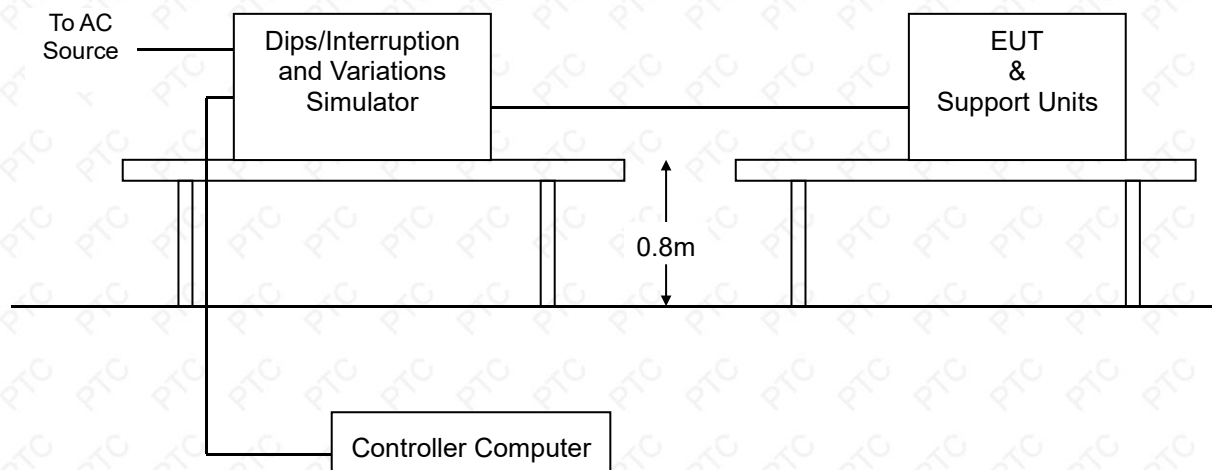

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.



#### 8.9.4. TEST RESULT

<b>Product</b>	AC frequency conversion barrier gate	<b>Environmental Conditions</b>	24.2°C, 54.5 % RH, 101.1 kPa
<b>Model</b>	D118	<b>Tested By</b>	Yang
<b>Test mode</b>	Working	<b>Test Result</b>	Pass

Test Power: 230 Vac, 50 Hz			
Voltage (% Reduction)	Duration (Period)	Observation	Performance Criterion
100	0.5 P	Note <input type="checkbox"/> 1 <input checked="" type="checkbox"/> 2 <input type="checkbox"/> 3	B
30	25 P	Note <input type="checkbox"/> 1 <input type="checkbox"/> 2 <input checked="" type="checkbox"/> 3	C
100	250 P	Note <input type="checkbox"/> 1 <input type="checkbox"/> 2 <input checked="" type="checkbox"/> 3	C

Note: 1) There was no change compared with initial operation during the test.

2) During the test the luminous intensity change ,and after the test the luminous intensity can be restored to its initial value within 1 min.

3) During the test, the luminous intensity change, and after the test the luminous intensity can return to normal within 30 min.

## 9. PHOTOGRAPHS OF THE TEST CONFIGURATION

### CONDUCTED EMISSION TEST



### RADIATED EMISSION TEST






## HARMONICS & FLICKER TEST



## ESD TEST

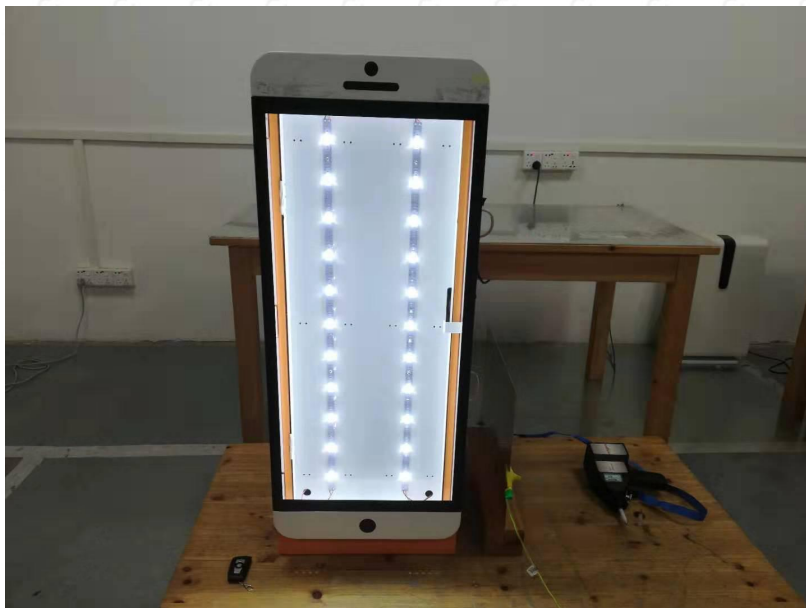

## RS TEST



## EFT TEST



## SURGE TEST



## CS TEST





## DIPS TEST



## 10. PHOTOGRAPHS OF EUT





Report No.: PTC19061402901E-EM01










Report No.: PTC19061402901E-EM01







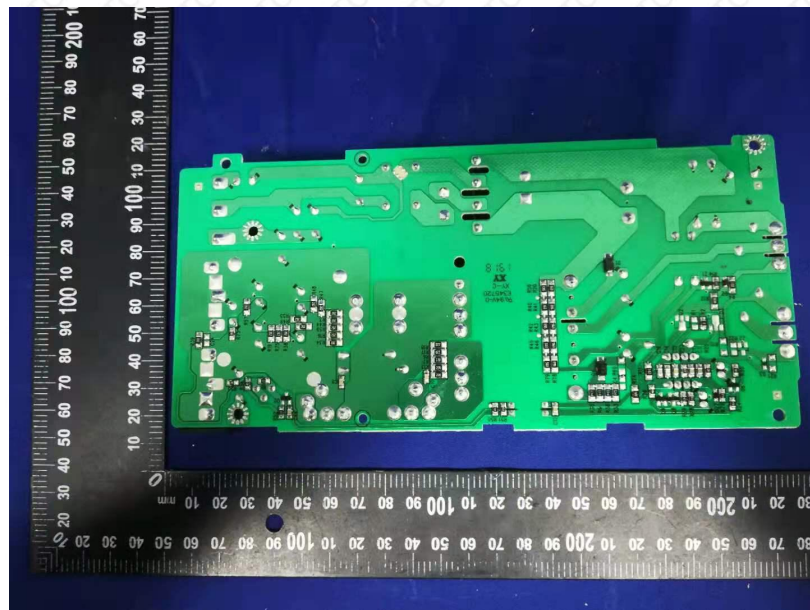



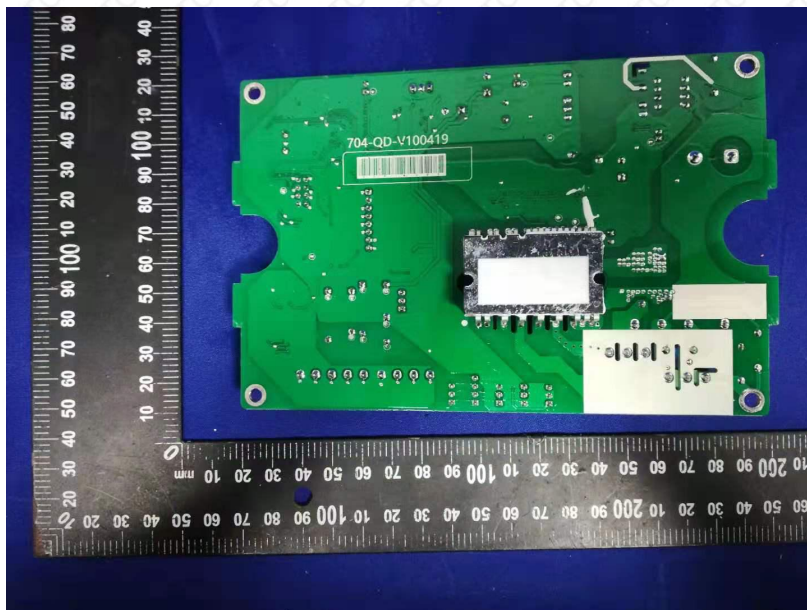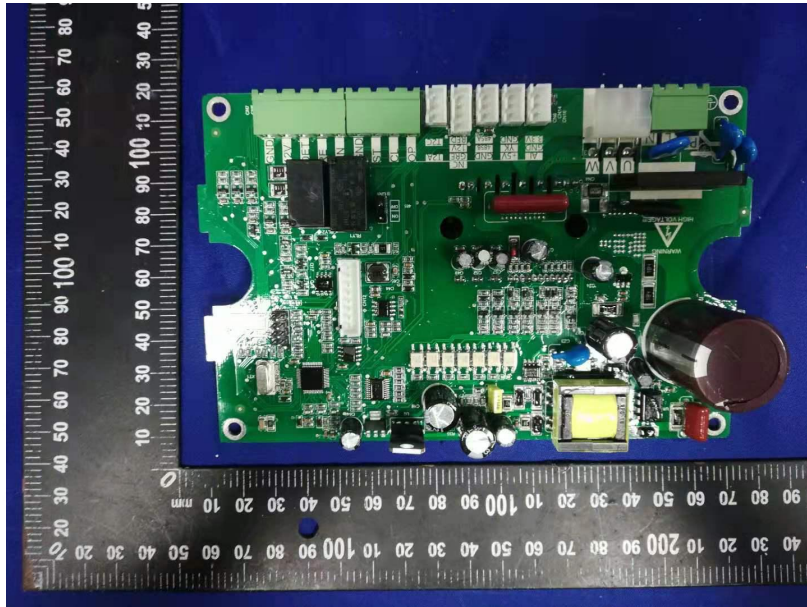

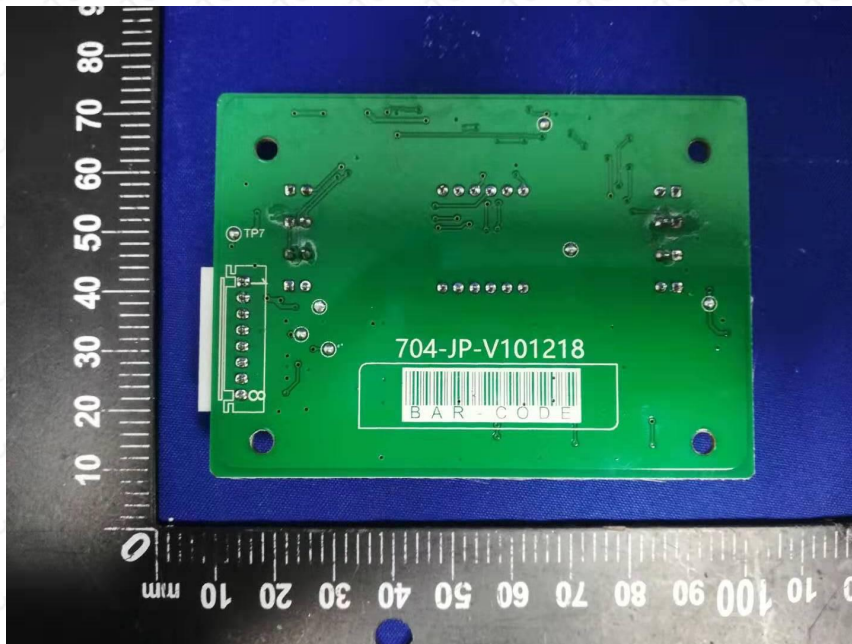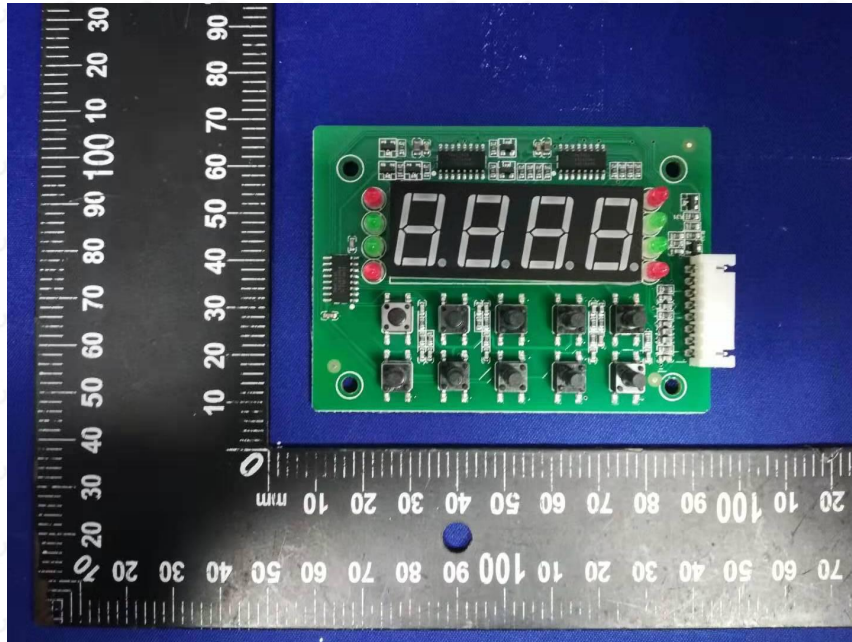

— End of report —